DIGITAL HOT WATER DISPENSER

MODEL: WB5GT

WB5GT
5 Gallon Capacity

ITEM NO

PROJECT

DATE

FEATURES AT A GLANCE

- **G3 Digital Control Module -** Provides precise control of temperature and aeration.
- **Agitation Pump -** Continuous or on demand aeration improves tea extraction and food flavor.
- **Large LED Display -** Easy to read, displays constant water dispense temperature.
- **Easy-To-Operate -** Simple graphic design with color coded buttons for all operating functions and ready lights.
- **Automatic Refill System**
- **Thermostatic Controls -** Programmable temperature range of 140°F to 210°F.
- **On Board Diagnostics -** Continually senses water level & temperature for proper operation.
- **Common Parts and Side Access -** Creates an easy to service unit.
- **Standard 120/220VAC Dual Voltage Operation.**

The Curtis G3 Water Boiler – Perfect for tea, soup, freeze-dried products, cleaning jobs and more!

With the latest in digital technology, these water boilers offer precise control over all critical functions. Curtis' digital Water Boilers deliver large volumes of piping hot water right at the preparation site. They are constructed of heavy gauge stainless steel and feature thermostatic controls and solid-state automatic refill systems.

Large LED Display - 140°F - 210°F

G3 GENERATION THREE

WB–5GT

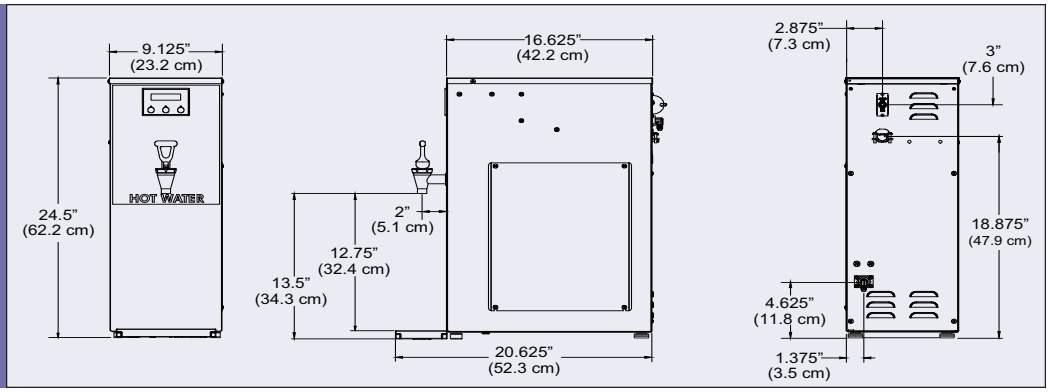

Specifications	Tank Capacity	Volume	Voltage	Power Requirements	Cord & Plug	Water Inlet	Dimensions (HxWxD)	Shipping Weight	Cube
WB5GT	5 Gallons	120VAC-4.6 gal/hr 220VAC-15.5 gal/hr	120/220VAC/60Hz 2W/3W+G*	1500W/12.5A 5000W/22.7A	6 ft./NEMA 5-15P 120V	1/4" Flare	24.5" x 9.125" x 16.625"	39 lbs.	5.7

*Optional 200VAC/3Phase - Specify 3 Wire or 4 Wire Plus Ground.

ACCESSORY ITEMS

CSC10

CSC15

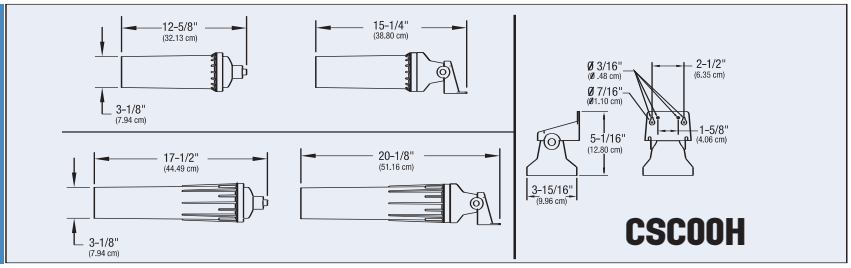

Specifications	Application/Description	Rated Life* (Gallons)	Flow (GPM)	Micron Rating	Pressure Range (psi)	Temperature Range (°F)	Water Connection	Ship. Wt.** (lbs.)	Cube** (cu. ft.)
CSC10AC00 with Head	Chlorine & Sediment Removal, Scale Prevention/OCS	10,000	1.65	10	35-125psi	35-100°F	3/8" FNPT	17	1.23
CSC10CC00 Cartridge Only	Chlorine & Sediment Removal, Scale Prevention/OCS	10,000	1.65	10	35-125psi	35-100°F		15	1.23
CSC15AC00 with Head	Chlorine & Sediment Removal, Scale Prevention/OCS	15,000	2.0	10	35-125psi	35-100°F	3/8" FNPT	23	1.69
CSC15CC00 Cartridge Only	Chlorine & Sediment Removal, Scale Prevention/OCS	15,000	2.0	10	35-125psi	35-100°F		21	1.69

***Rated Life is for Chlorine Removal. To ensure proper control of scale, filters should be replaced every 6 months.**

**** Shipping Weight and Cube are per cases of 6.**

CSC10 - Water Filter

CSC15 - Water Filter

WILBUR CURTIS COMPANY, INC.
6913 Acco Street, Montebello, CA 90640-5403
Telephone: 800-421-6150 · 323-837-2300
Fax: 323-837-2406
www.wilburcurtis.com

© 2007 Wilbur Curtis Company, Inc.

Printed In U.S.A · DEC/07 – 15047 F-3561 rev. C